



FS50-STAINLESS STEEL GREASE FILTER

All filters are supplied standard with bail handles.


MATERIAL: STAINLESS STEEL TYPE 302, 304 OR 430 .0157" - .020" THICK

FINISH: 2-B MILL FS50-XXXX-HD MODELS

FINISH: BRIGHT ANNEALED FS50-XXXX-BA MODELS

CHANGE PREFIX (FS50) TO FS51 FOR FILTER WITH (2) LOCKING STYLE HANDLES

MODEL	DIM A	DIM B	FRONT BAFFLES	BACK BAFFLES
FS50-1016-XX	9.50 (241 mm)	15.50 (394 mm)	5	4
FS50-1216-XX	11.50 (292 mm)	15.50 (394 mm)	5	4
FS50-1616-XX	15.50 (394 mm)	15.50 (394 mm)	5	4
FS50-2016-XX	19.50 (495 mm)	15.50 (394 mm)	5	4
FS50-2516-XX	24.50 (622 mm)	15.50 (394 mm)	5	4
FS50-1020-XX	9.50 (241 mm)	19.50 (495 mm)	6	5
FS50-1220-XX	11.50 (292 mm)	19.50 (495 mm)	6	5
FS50-1620-XX	15.50 (394 mm)	19.50 (495 mm)	6	5
FS50-2020-XX	19.50 (495 mm)	19.50 (495 mm)	6	5
FS50-2520-XX	24.50 (622 mm)	19.50 (495 mm)	6	5
FS50-1625-XX	15.50 (394 mm)	24.50 (622 mm)	8	7
FS50-2025-XX	19.50 (495 mm)	24.50 (622 mm)	8	7

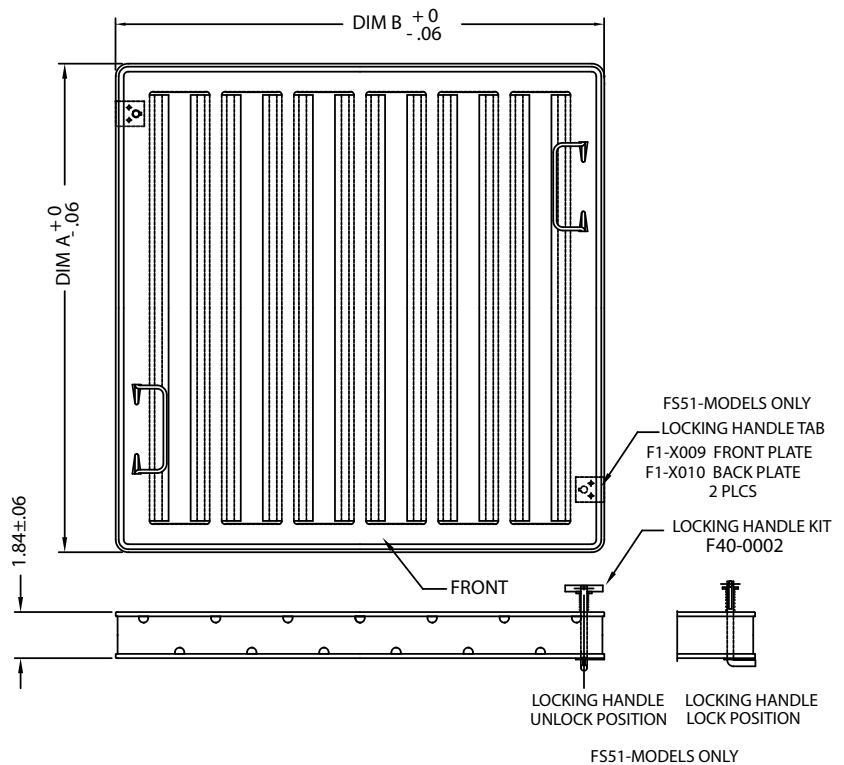

OPTIONAL LOCKING HANDLES: Filters with locking handles are available to comply with Maryland, Virginia and Washington D.C. specifications for commercial hoods.

NOTE: To order state size with prefix...
FS51...for Stainless Steel